

HDMI to AV Converter

#H2A0101W00

Product Description

HDMI to AV converter, convert HDMI signal to CVBS video and L/R audio. Supports NTSC and PAL video system according to the setting of the DIP-switch. It can be used at home theatre.




Features:


- HDMI 1.3 compliant
- Support additional power supply by mini USB cable
- Support NTSC and PAL video system.
- Support HDMI input resolution: 640x480@60Hz, 800x600@60Hz, 1024x768@60Hz, 1280x720@60Hz, 1280x1024@60Hz, 1360x768@60Hz, 1600x1200@60Hz, 1920x1080@60Hz, 480i/60Hz, 480P/60Hz, 576i/60Hz, 576P/60Hz, 720P50/60Hz, 1080i50/60Hz, 1080P50/60Hz.
- L/R stereo audio output
- Power on cable

Packing List:

- 1 * HDMI to AV Converter
- 1 * Mini USB Cable (Power supply)
- 1 * User Manual

Panel Description:

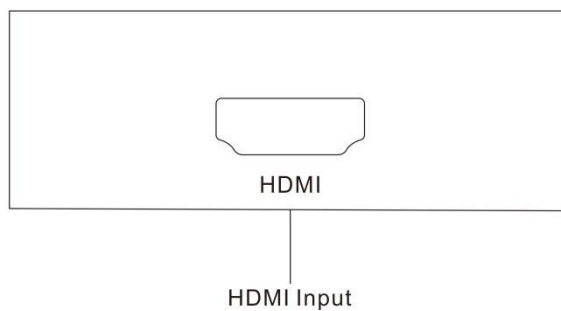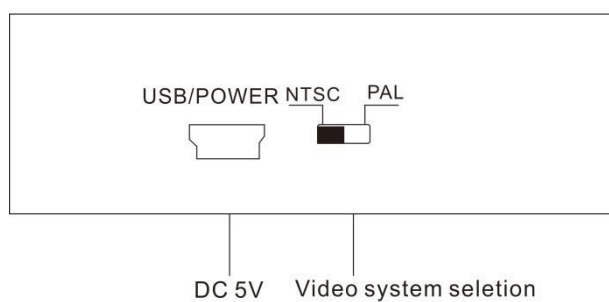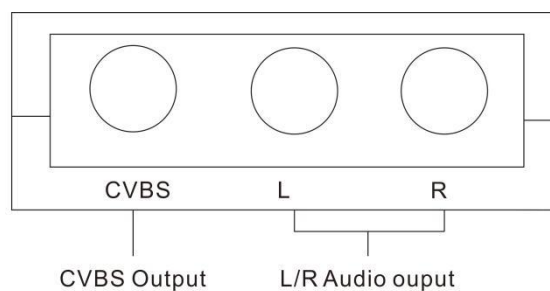

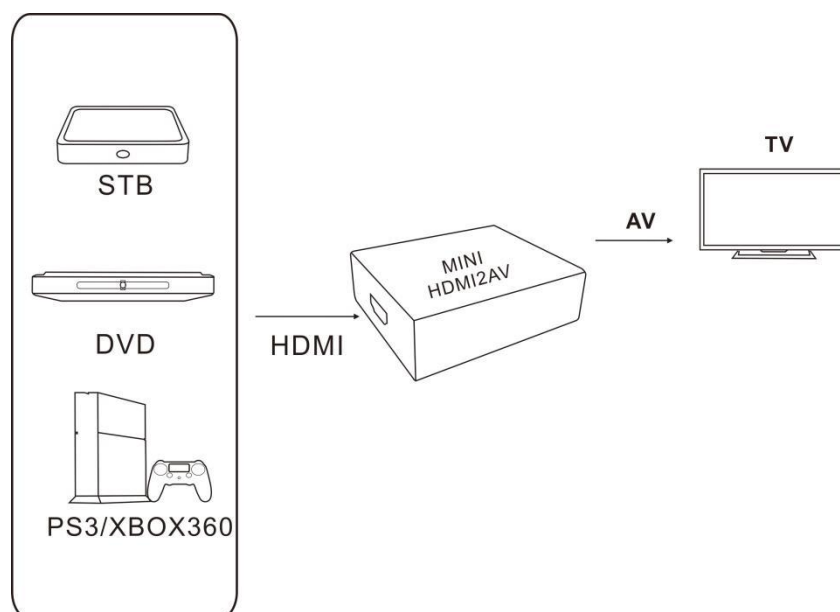Connection diagram:

Specification:

H2A0101W00	HDMI to AV Converter
Technical	
Support TV systems	NTSC-M,NTSC-J,PAL
Data rate	10.2 Gbps
Input Resolution	640x480@60Hz, 800x600@60Hz, 1024x768@60Hz, 1280x720@60Hz, 1280x1024@60Hz, 1360x768@60Hz, 1600x1200@60Hz, 1920x1080@60Hz, 480i/60Hz, 480P/60Hz, 576i/60Hz, 576P/60Hz, 720P50/60Hz, 1080i50/60Hz, 1080P50/60Hz.
ESD protection	Human body model - $\pm 8\text{kV}$ (Air-gap discharge)
Input	1* HDMI type A
Output	3* RCA Jack (Video & L/R Audio)
Mechanical	
Chasing material	Plastic
Product Dimensions	66(D)x55(W)x20(H)mm
Item Weight	40g
Power supply	DC 5V 1A
Operating/Storage temperature	0 to 70 degree/-40 to 85 degree
Operating Humidity	10 to 90% RH