

70M HDMI KVM Extender

#HKE0711C1H

This 70M HDMI KVM Extender with multi-function HKE0711C1H, extends HDMI and USB signal up to 70 meters over a single CAT5e/6 cable. Support USB1.1 extension, providing access to keyboard, mouse, touch-panels, printers, and USB drive. Support resolutions up to 1920*1080@60Hz (For 70M UTP/FTP). Support EDID pass through, best compliant with different display device. Support infrared control signal pass through. Support extra audio output. With customized remote button, it is easy to turn on PC remotely

Features:


- HDCP compliant.
- Resolution up to 1920*1080@60Hz(For 70M UTP/FTP).
- Support USB 1.1 extension.
- Providing access to keyboard, mouse, touch-panels, printers, and USB drive etc.
- IR pass through.
- Remote PC power switch control.
- Support speaker output on receiver.

Packing List:


- 1 * HDMI KVM Extender transmitter
- 1 * HDMI KVM Extender receiver
- 2 * DC 12V Adapter
- 1 * IR transmitter
- 1 * IR receiver
- 1 * User manual

Panel Description:


Transmitter:

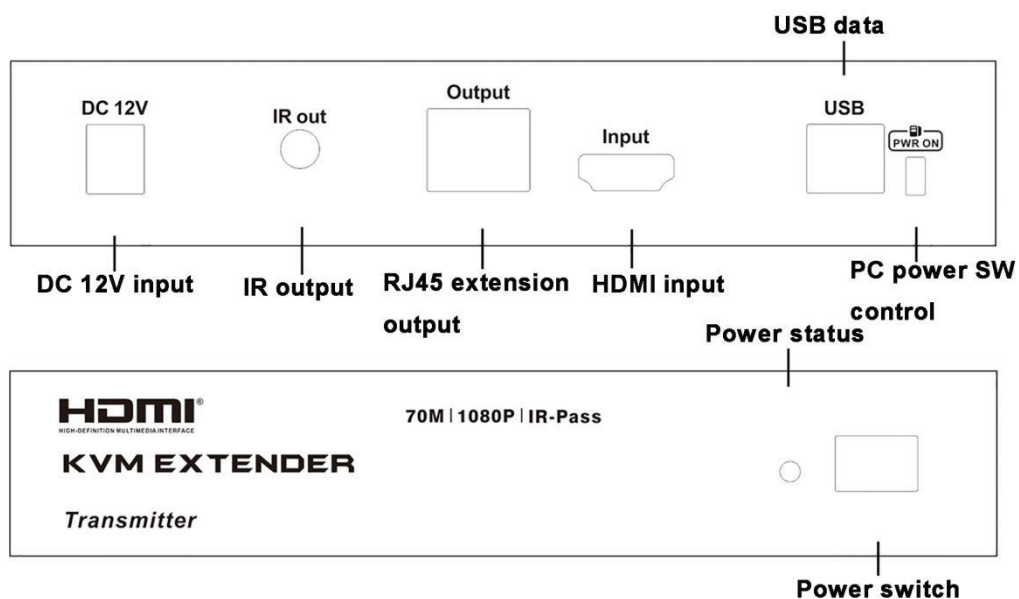

Receiver:

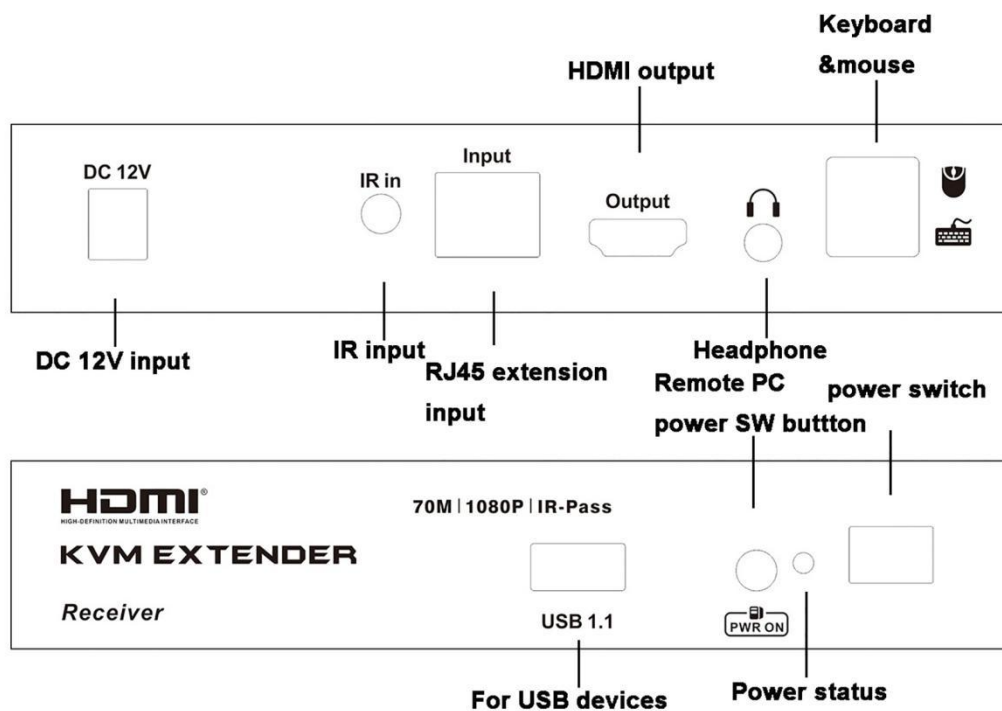

Connection Diagram

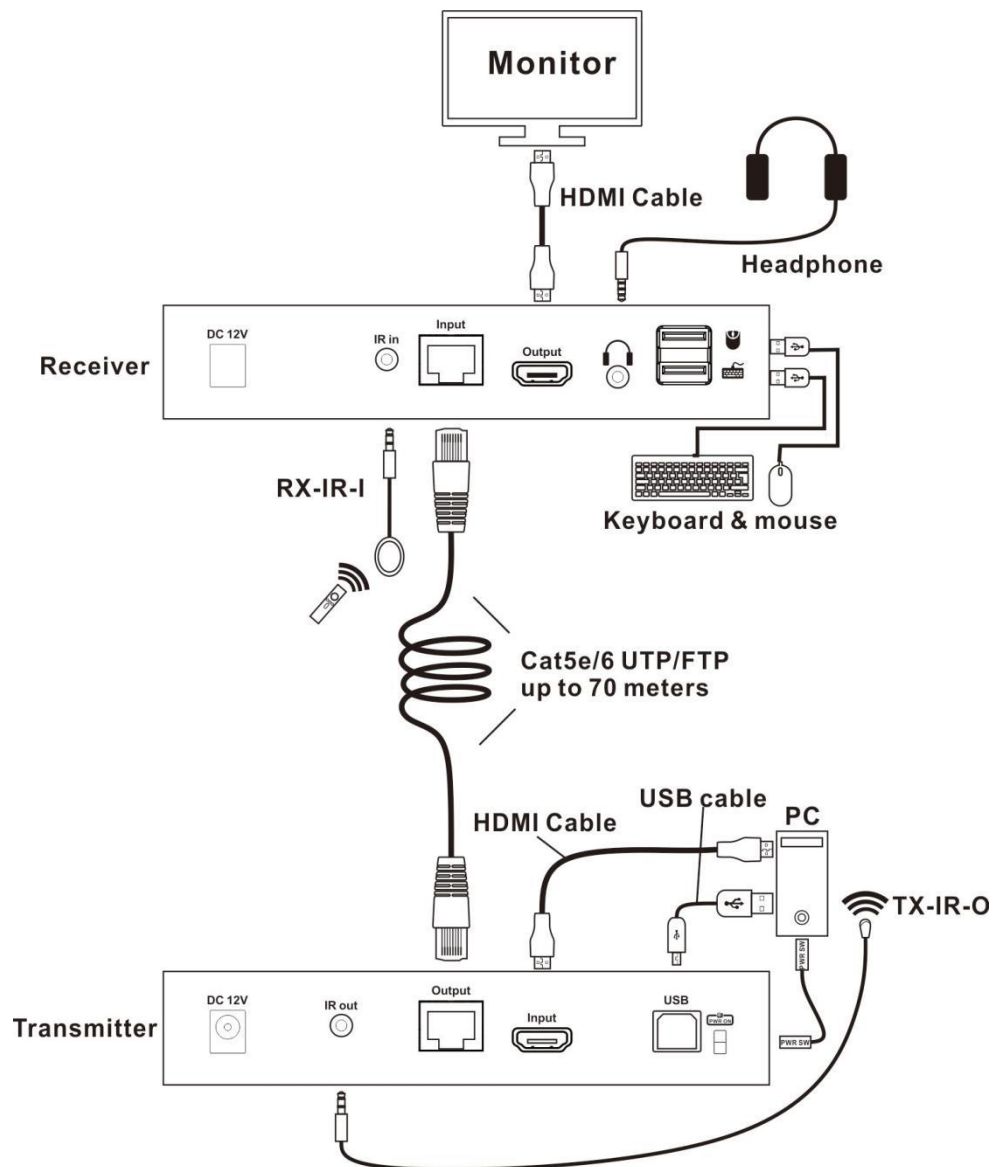

Specification:

HKE0711C1H	70M HDMI KVM Extender
Technical	
HDCP compliance	1.4
Data rate	10.2 Gbps
Max. Resolution	1920*1080@60Hz(For 100M UTP cable)
ESD protection	Human body model - $\pm 8\text{kV}$ (Air-gap discharge)
Input	Transmitter: 1* HDMI Type A, Receiver: 1* RJ45, 2* USB Type A(keyboard and mouse), 1*USB Type A(USB1.1), 1* AUX(for IR in),
Output	Transmitter: 1* RJ45, 1* USB Type B, 1* AUX(for IR out) Receiver: 1* HDMI Type A, 1* AUX(for Audio out)
Mechanical	
Chasing material	Aluminum Alloy
Product Dimensions	RX: 160 (W) x 90 (D) x 30 (H) mm TX: 160 (W) x 90 (D) x 30 (H) mm
Item Weight	330g
Power supply	TX: DC 12V 2A RX: DC 12V 2A
Operating/Storage temperature	0 to 70 degree/-40 to 85 degree
Operating Humidity	10 to 90% RH