

1X9 HDMI Splitter Extender w/ IR

HSE0619A10

Products Description

This 1X9 HDMI Splitter Extender distributes one FHD source to 9 output sets, It has one HDMI local output and 8 UTP extension outputs. The UTP extension supports 1080P@60Hz transmission up to 60 meters. By using the front-panel buttons select EDID mode, make it compatible with most of the HDMI source and sink devices. According to extended IR Signal Transmission, it is convenient to control media player on receiver side with IR remote control.

Features


- IR pass through bidirectional
- Compliant with HDCP 1.3
- UTP extender supports resolution up to 1080P@60Hz
- It has one HDMI local output and Eight UTP extension outputs which connected to same input source.
- Supports PCM, Dolby AC3, DTS5.1, DTS7.1 and DSD audio format
- Selectable EDID mode, make it compatible with most display devices
- Supports DVI-D single link source and displays with the use of HDMI-to-DVI adapters.
- 8KV ESD protection

Package Included

- 1 * HDMI Splitter Extender 1X9
- 4 * HDMI Extender Receiver
- 2 * Rack-ears
- 5 * IR Receiver Cable
- 5 * IR Transmitter Cable
- 1 * DC 12V Power Adapter
- 4 * DC 5V Power Adapter
- 1 * User Manual


Panel description

Splitter Extender(Transmitter):

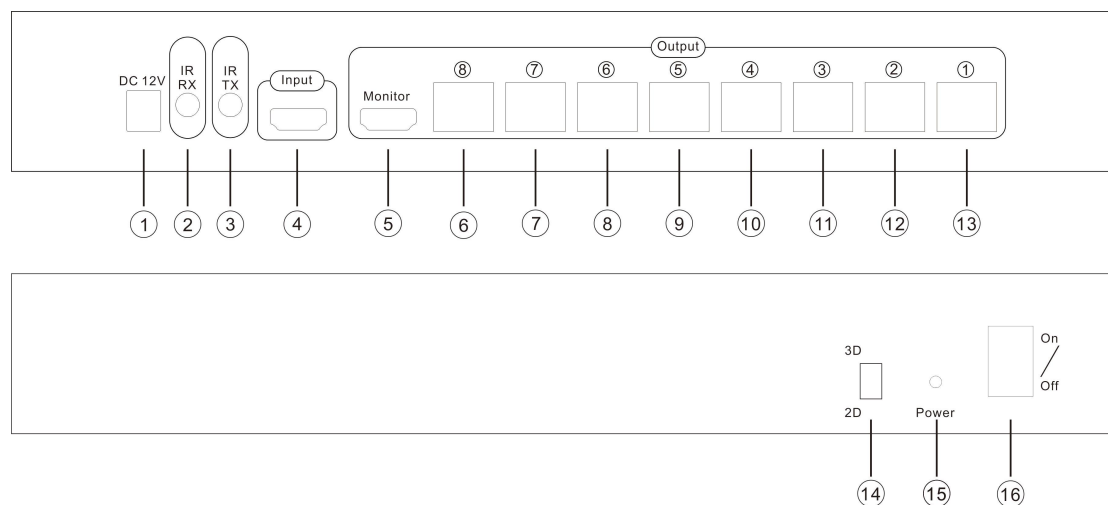


- | | |
|-------------------|---------------------|
| 1. DC 12V | 9. UTP output |
| 2. IR Receiver | 10. UTP output |
| 3. IR Transmitter | 11. UTP output |
| 4. HDMI input | 12. UTP output |
| 5. HDMI output | 13. UTP output |
| 6. UTP output | 14. EDID Mode |
| 7. UTP output | 15. Power Indicator |
| 8. UTP output | 16. Power Switch |

Receiver(Optional):

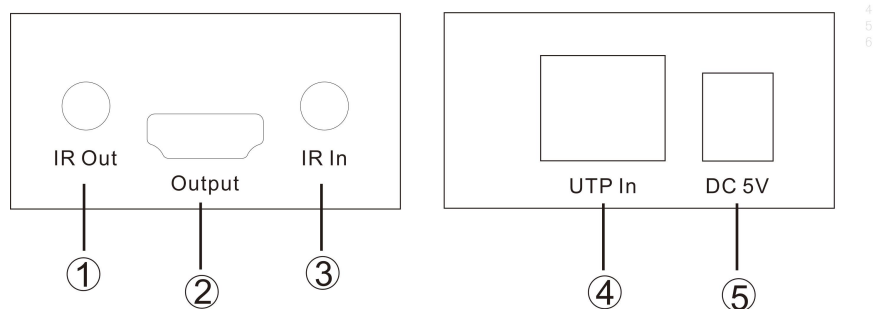

- | |
|-------------------|
| 1. IR Output |
| 2. HDMI output |
| 3. IR Input |
| 4. UTP cable port |
| 5. DC 5V |

Connection diagram

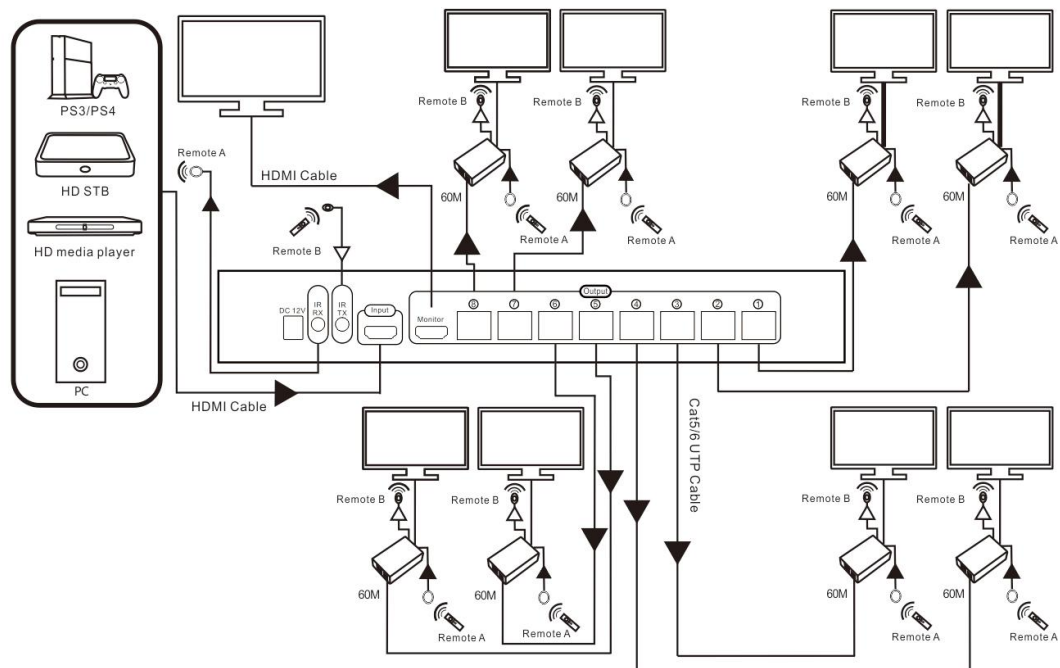

Specification

HSE0619A10	1X9 HDMI Splitter Extender w/ IR
Functionality	
OSD	No
EDID	Yes
Technical	
Resolution	Up to 1080P@60Hz 3D
HDCP version	1.3
Data rate	10.2 Gbps
Input	1*HDMI Type A
Output	1*HDMI Type A, 8*RJ45, CAT5E/6 UTP cable up to 60M (1080P@60Hz)
ESD protection	Human body model - ± 8 kV (Air-gap discharge)
Mechanical	
Chasing material	Metal
Product Dimensions	308 (L) x 140 (W) x 44.5 (H) mm
Item Weight	2500g
Power supply	DC 12V 2A
Operating/Storage temperature	0 to 70 degree/-40 to 85 degree
Operating Humidity	10 to 90% RH