

1x4 HDMI Splitter 4K@60Hz

#HSP0104A1U

This 1x4 HDMI splitter distributes one Ultra HD A/V source to four Ultra HD displays simultaneously without loss of quality. Compliant with HDCP 2.2, support resolution up to 4K@60Hz 4:4:4. With smart EDID management, let the source device sends suitable A/V contents to the variable displays. Supports LPCM 7.1, Dolby®TrueHD, Dolby Digital® Plus, and DTS-HD® Master Audio™.


Features:

- Distribute one Ultra HD A/V source to 4 Ultra HD displays
- HDCP 2.2 compliant
- Support resolution up to Ultra HD 4K@60Hz 4:4:4
- Available to display 1080P@60Hz and 3840*2160@60Hz 4:4:4 for different resolution monitors at the same time
- Support up to 36 bit/pixel Deep Color
- Support LPCM 7.1, Dolby® TrueHD, Dolby Digital® Plus, and DTS-HD® Master Audio™
- Support smart EDID management, compatible with most of the HDMI sources and displays
- Support HDR 10 and Dolby Vision

Packing List:


- 1 * HDMI Splitter 1x4
- 1 * DC 5V Power Adapter
- 1 * User manual

Panel Description:

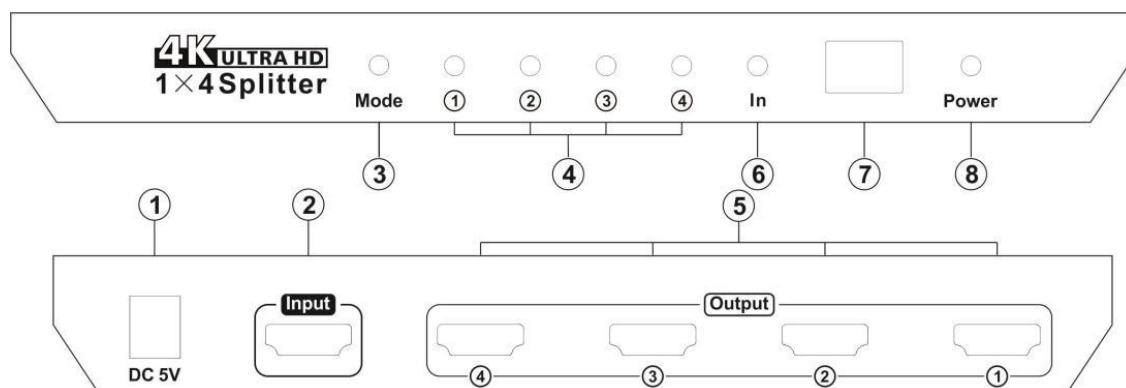

ID	Name	Description
1	DC 5V	DC 5V power supply
2	HDMI input	Connect to HDMI source
3	EDID mode adjust	1) Only LED 1 is blinking: Low resolution display is priority 2) Only LED 2 is blinking: Compliant with 4K and 1080P displays 3) LED 1 and LED 2 are blinking: Output 1 is priority
4	HDMI output status	LEDs will be lit if the output connect to displays
5	HDMI output	Connect to HD display
6	HDMI input status	LEDs will be lit if the input connect to HDMI source
7	Power switch	Turn on or turn off power
8	Power status	Indicate if power supply is available

Connection Diagram

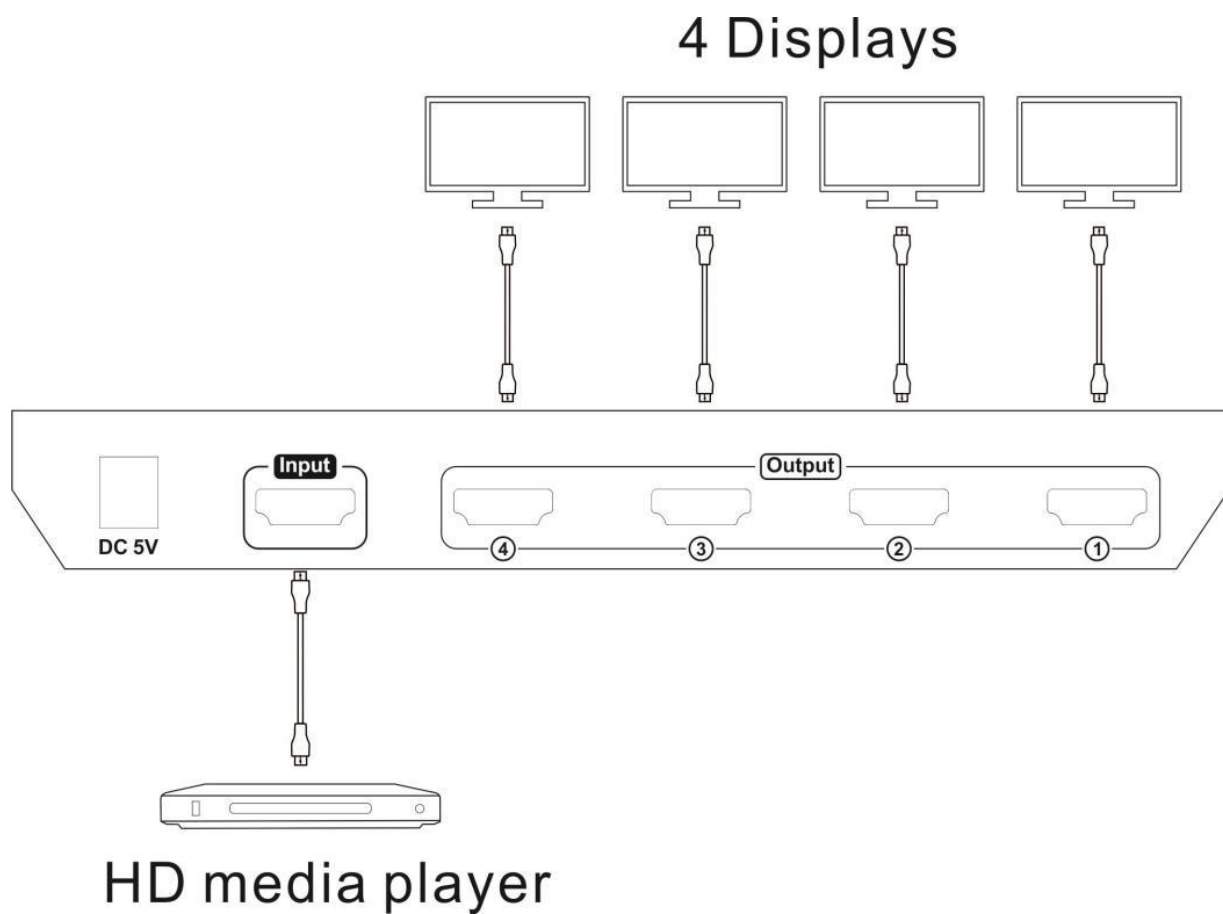

Specification:

HSP0104A1U	1x4 HDMI Splitter 4K@60Hz	
Functionality:		
Smart EDID	Yes	
Technical:		
Max. Resolution	3840*2160@60Hz 4:4:4	
HDCP version	2.2	
Data rate	18 Gbps	
Input	1* HDMI Type A	
Output	4* HDMI Type A	
ESD protection	Human body model - ±8KV (Air-gap discharge)	
Mechanical		
Chasing material	Aluminum Alloy	
Power supply	DC 5V 1A	
Operating/storage temperature	0 to 70 degree/-40 to 85 degree	
Operating humidity	10 to 90% RH	
Product	Dimension	196 (L) x 80 (W) x 24 (H) mm
	Weight	246g
Item	Dimension	245 (L) x 135 (W) x 90 (H) mm
	Weight	522g
Carton	Dimension	515 (L) x 285 (W) x 470 (H) mm
	Quantity	20pcs
	Total Weight	11.29kg