

1x16 HDMI Splitter 4K@60Hz 4:4:4

HSP0116A1U

This 1X16 HDMI splitter routes one Ultra HD A/V source to 16 Ultra HD displays simultaneously without loss of quality. Compliant with HDCP 2.2, support resolution up to 4K@60Hz. With smart EDID management, make it compatible with most of the HDMI displays and sources. Support pass through LPCM 7.1, Dolby®TrueHD, Dolby Digital® Plus, and DTS-HD® Master Audio™.

Application:

The HDMI splitter(HSP0116A1U) is applied to TV stores, exhibition hall, bars, KTV clubs, schools, hospitals, hotel lobbies, retail establishments and any other installations where Ultra HD AV content from an HDMI source needs to be displayed simultaneously on up to 16 Ultra HD displays.


Features:

- Simultaneously display an Ultra HD source on up to 16 Ultra HD displays
- Support the resolution up to Ultra HD 4K 60Hz 4:4:4
- Support up to 36 bit/pixel Deep Color
- Support LPCM 7.1, Dolby® TrueHD, Dolby Digital® Plus, and DTS-HD® Master Audio™
- Support HDR10 and Dolby Vision
- HDCP2.2 compliant
- Adjust the resolution of the input source according to the resolution of the display


Packing List:

- 1 * 1x16 HDMI Splitter
- 1 * DC 12V 2A Power adapter
- 1 * Quick-Start Guide

Panel Description:

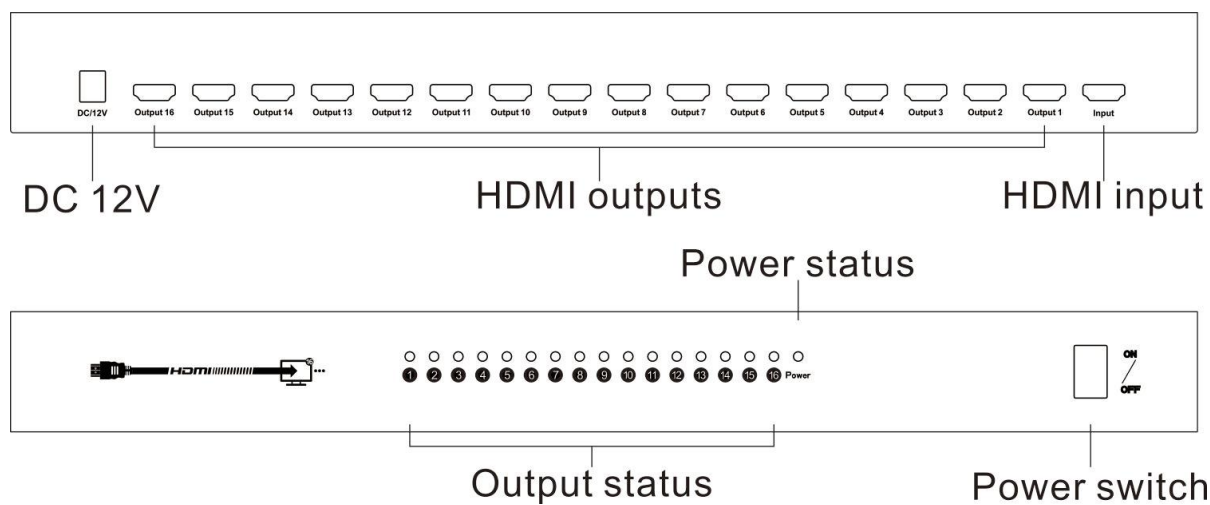

Connection Diagram:

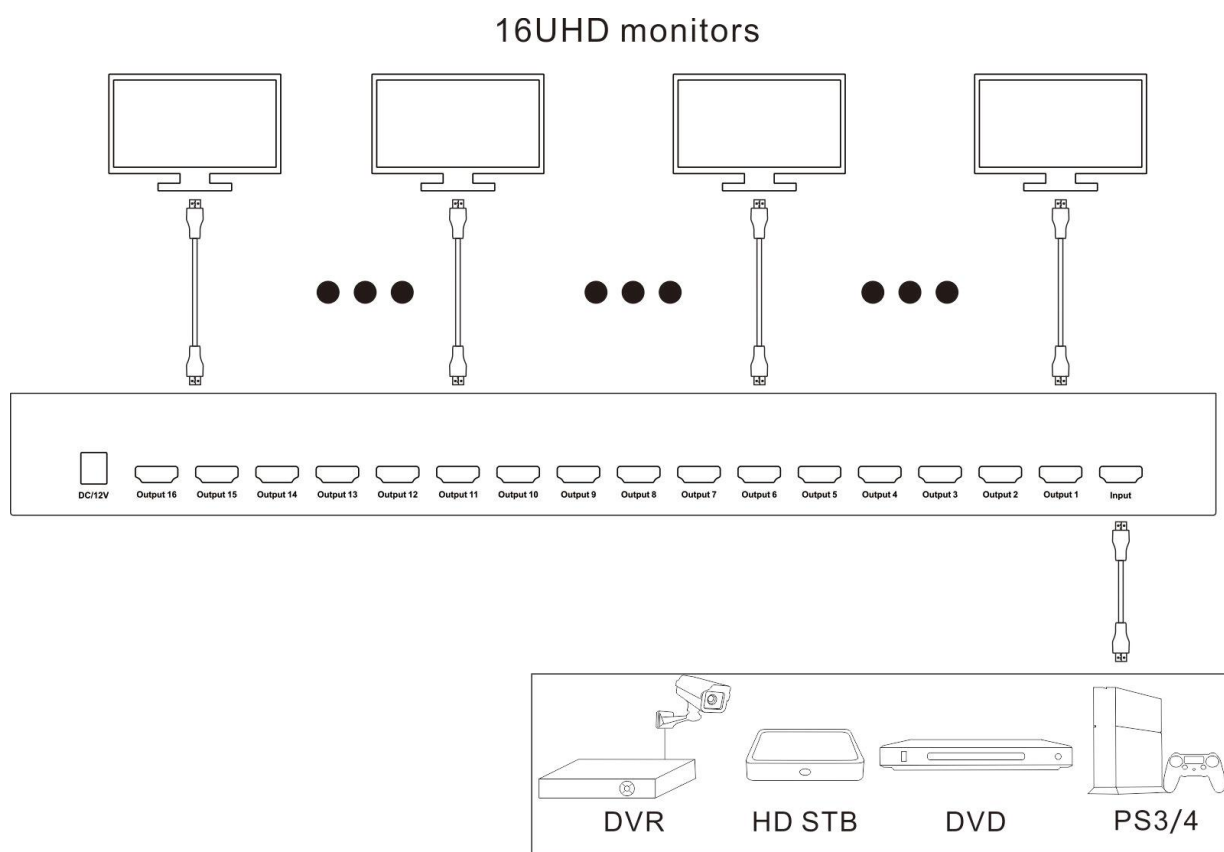

Specification:

HSP0116A1U	1x16 HDMI Splitter	
Functionality:		
Smart EDID	Yes	
Technical:		
Max. Resolution	3840*2160@60Hz	
HDCP version	2.2	
Data rate	18 Gbps	
Input	1* HDMI Type A	
Output	16* HDMI Type A	
ESD protection	Human body model - ±8kV (Air-gap discharge)	
Mechanical		
Chasing material	Aluminum Alloy	
Power supply	DC 12V 2A	
Operating/storage temperature	0 to 70 degree/-40 to 85 degree	
Operating humidity	10 to 90% RH	
Product	Dimension	400 (L) x 139 (W) x 44.5 (H) mm
	Weight	1675g
Item	Dimension	488 (L) x 123 (W) x 186 (H) mm
	Weight	2161g
Carton	Dimension	505 (L) x 280 (W) x 395 (H) mm
	Quantity	4pcs
	Total Weight	9.394kg